

Decorative Flexible Board A

Stendo#300 (Noncombustible) NM-2923



Dependable products for interior spaces requiring superior strength and water resistance



These products consist of autoclave-cured cement boards finished with a hot-applied urethane resin coating. The smooth surface and rich colors help to create interior spaces that combine comfort with a sense of cleanliness. The base board (Selflex A) provides excellent strength, dimensional stability and water resistance.

Standard Specifications

Decorative layer	Acrylic-urethane resin			
Base board	Selflex A (flexible board A)			
Thickness	mm	4	5	(6)
Width × Length	mm	910×1820		(910×910) (910×2420)
Standard weight	kg/m ²	7.5	9.4	11.2
Remarks	Decorative surface: Both long edges chamfered			

※Standard product weights are standard values adjusted for moisture absorption ratios.
() Sizes in parentheses are made-to-order.

Decorative Layer Cross-section

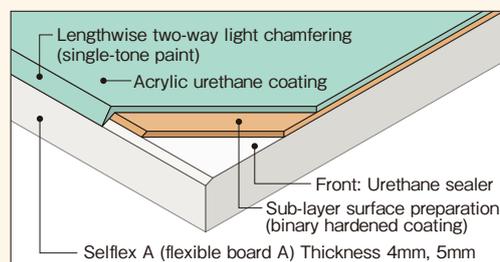

Features

- Noncombustible interior finishing decorative boards with excellent surface smoothness
- Superior impact resistance compared with other decorative panels
- Ideal for areas in which water is used, excellent water resistance thanks to characteristics of base board
- Sophisticated urethane-based decorative surface—highly resistant to soiling and chemicals
- Contains no formaldehyde—can be used with confidence as a product not covered by VOC regulations

Uses

- ◆ Interior finishing in commercial buildings, factories, warehouses, etc.
- ◆ Interior walls and ceilings in station buildings, public facilities, etc.
- ◆ Suitable for a wide range of uses in kitchens and sanitary facilities, etc.

Standard color

Always in stock/Size (910 x 1820mm)
Thickness (4, 5mm)



※Stendo#300: Also available in antimicrobial specification (special order).
※Please note that actual colors may differ from those shown here because of the limitations of the printing process.